

Standard Flex NID

The FLEX NID product family offers flexibility and can be deployed for SFU, simplifying deployment and craft interaction. The Outdoor rated compact FTTx product provides easy craft-friendly installation for SFU Fiber Connectivity. In addition to great esthetics, the product can reduce deployment time reliably.

FEATURES

FLEXIBLE LAY-IN CABLE ENTRY SYSTEM FOR INCOMING AND OUTGOING CABLE

CABLE MEDIUM SEPARATION - THE DUAL MEDIUM RADIUS CABLE MANAGEMENT-SYSTEM ENABLES THE STORAGE AND SEPARATION OF THE OUTER JACKET IN A SEPARATE CHANNEL.


PIVOTING SPLICE TRAY CAN HOLD UP TO 8 SPLICES.

TOOLLESS CABLE CLAMP AT ENTRY PORT

MULTIFUNCTION GROUND AND STRENGTH MEMBER TIE BAR

POLE OR WALL MOUNT

CAN ACCEPT CONDUIT OR MICRODUCT

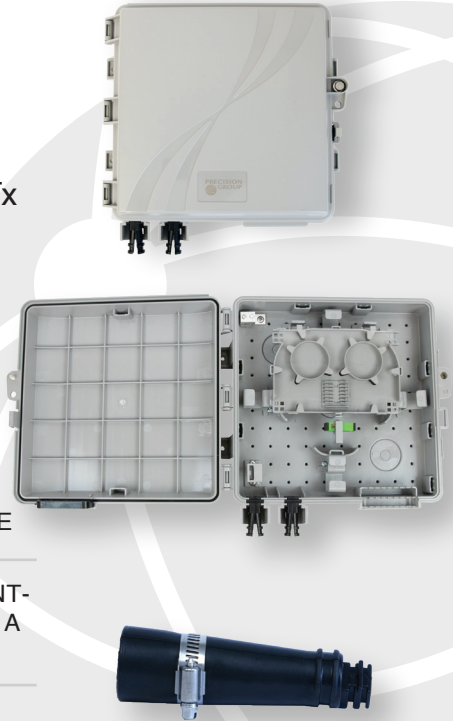

ORDERING GUIDE

PFFLEXNID-C01000000	Patch and Splice NID with SCAPC Adapter
PF-FLEXNID-C0100002	Fiber Nid Patch and Splice with conduit Grommet (PF-NIDCGM), SCAPC adapter Cable Clamp Bar bonding hardware and Splice tray.
PF-FLEXNID-C01BS00-002	Patch and Splice NID with No splitter, SCAPC connector, 1 Simplex Adapter, No pigtail, 0 tails, NID With Conduit Grommet.
PFFLEXNID-P01000000	Patch ONLY NID with SCAPC Adapter
PF-NIDCGM	Precision FLEXNID Conduit (Riser) Grommet

SPECIFICATIONS

Dimensions: 10.2 H x 10.6" W x 3" D

Materials: UL and UL 94-5VA outdoor flame retardant PBT/PC blend thermoplastic

UL1863 Performance: Designed to meet GR-049-CORE, GR-2898- CORE & GR-3125-CORE.

Adapter exceeds the requirements of GR-326-CORE.

Finish: Light Gray