

ALTOS® Loose Tube, Gel-Free Cable 48 F, Single-mode (OS2)



Part Number:
048EU4-T4100D20

Corning ALTOS® all-dielectric gel-free cables are designed for outdoor and limited indoor use for backbones in lashed aerial and duct installations. The loose tube gel-free design is fully waterblocked using craft-friendly, water-swellable materials, which means cable access is simple and no clean up is required. The flexible craft-friendly buffer tubes are easy to route in closures, and the SZ-stranded, loose tube design isolates fibers from installation and environmental rigors while allowing easy mid-span access. The all-dielectric cable construction requires no bonding or grounding, and these cables have a medium-density polyethylene jacket that is rugged, durable and easy to strip.

Features and Benefits

Gel-free waterblocking technology


Craft-friendly cable preparation

Polyethylene jacket


Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)

All-dielectric construction

Requires no grounding or bonding

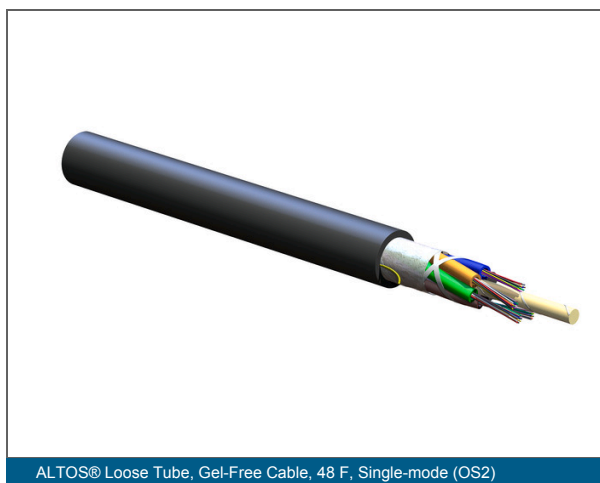

ALTOS® Loose Tube, Gel-Free Cable, 48 F, Single-mode (OS2)

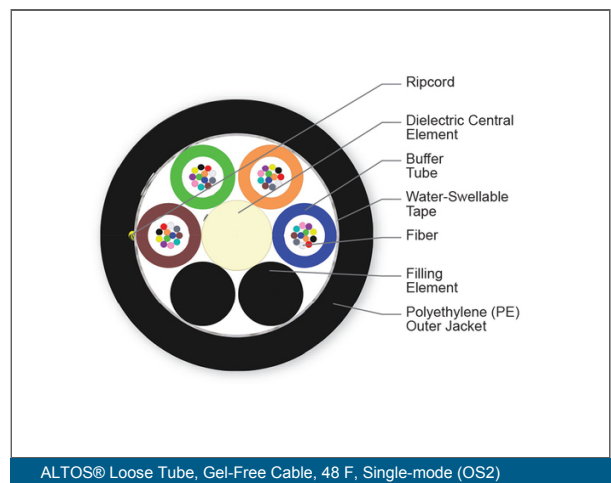

ALTOS® Loose Tube, Gel-Free Cable, 48 F, Single-mode (OS2)



ALTOS® Loose Tube, Gel-Free Cable 48 F, Single-mode (OS2)



Specifications

General Specifications	
Environment	Outdoor
Cable Type	Loose Tube
Product Type	Dielectric
Fiber Category	Single-mode (OS2)
Application	Aerial, Duct
Fiber Count	48

Standards	
RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Common Installations	Outdoor lashed aerial and duct, indoor when installed according to National Electrical Code® (NEC®) Article 770
Design and Test Criteria	ANSI/ICEA S-87-640

Environmental Conditions	
Temperature Range, Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Temperature Range, Operation	-40 °C to 70 °C (-40 °F to 158 °F)
Temperature Range, Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Notes	Corning recommends storing cable in a proper temperature environment prior to installation to allow the cable temperature to meet installation temperature range specifications for best installation results.

Cable Design	
Central Element	Dielectric
Fiber Count	48
Number of Ripcords	1
Outer Jacket Color	Black



and



ALTOS® Loose Tube, Gel-Free Cable 48 F, Single-mode (OS2)



Cable Design	
Outer Jacket Material	Polyethylene (PE)
Buffer Tube Color	Blue, Orange, Green, Brown
Buffer Tube Diameter	2.5 mm (0.1 in)
Number of Active Tubes	4
Number of Filling Elements	2
Number of Tube Positions	6
Tape	Water-swellable
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12
Color Code Standards	Telcordia

Mechanical Specifications	
Max. Tensile Strength, Long-Term	890 N (200.08 lbf)
Max. Tensile Strength, Short-Term	2700 N (606.98 lbf)
Nominal Outer Diameter	10.5 mm (0.41 in)
Min. Bend Diameter Installation	316 mm (12.44 in)
Min. Bend Diameter Operation	210 mm (8.27 in)

Optical Characteristics	
Fiber Code	E
Fiber Name	Single-mode (OS2)
Fiber Type	Single-mode
Performance Option Code	00
Maximum Attenuation	0.35 dB/km / 0.35 dB/km / 0.25 dB/km
Wavelengths	1310 nm / 1383 nm / 1550 nm
Fiber Category	G.652.D



ALTOS® Loose Tube, Gel-Free Cable 48 F, Single-mode (OS2)



Dimensions	
Cable Weight	73 kg/km (49.05 lb/1000 ft)



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2024 Corning Optical Communications. All rights reserved.



and

CORNING

